



13

IGP Powder Coatings

TDS IGP-RAPID®primer 134SA-A1|240424|v1.4

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: **igp-powder.com**

IGP Powder Coatings

TDS IGP-RAPID®primer 134SA-A1|240424|v1.4

Technical data sheet

IGP-RAPID®*primer* 134SA-A1

Highly reactive primer that optimally prepares MDF substrates for finishing with IGP-RAPID®top.



Characteristics

- Silk gloss
- Var. fine texture
- Uni colors
- Indoor quality



Powder properties

Particle size:

Solids:

Density:

Suitability for storage:

< 3.94 mil

> 99 %
10.01 lb/gal-13.35 lb/gal
min. 6 months at ≤ 59 °F
min. 6 months at ≤ 59 °F
in an unopened original container
Color tones:
ca. RAL 7035



Processing


Pre-treatment

If the surface finish of the MDF ex-works does not meet the quality requirements of the end product, the surface has to be sanded. This will ensure that the material has an evenly smooth surface and is free of any contaminants, minor scratches, dust, grease, etc. For more information, see IGP-TI 111.

Coating devices

All conventional electrostatic systems with corona charging. For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.

Curing conditions

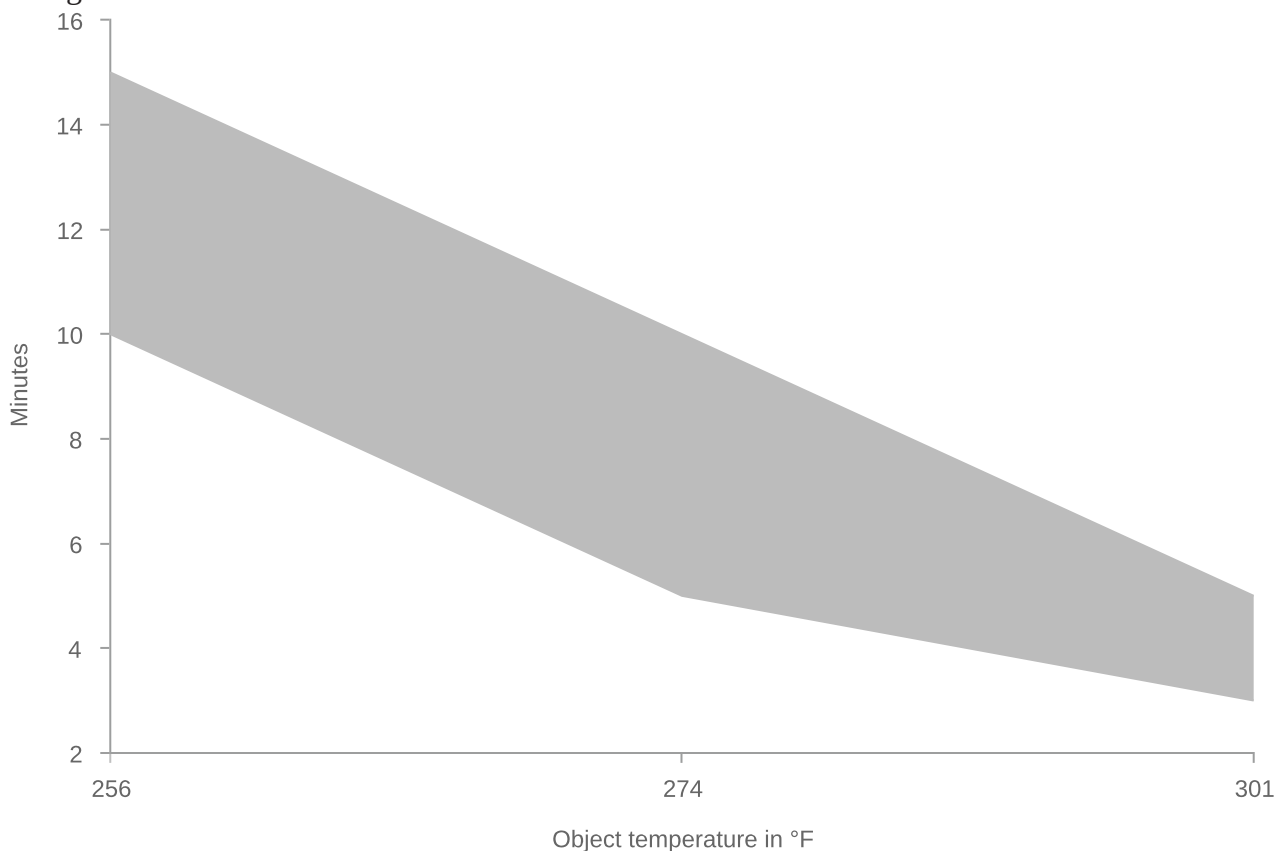

T_{Object} **t_{min}** **t_{max}**
257 °F 10 minutes 15 minutes

T	Object	t_{min}	t_{max}
275 °F		5 minutes	10 minutes
302 °F		3 minutes	5 minutes

Due to the limited thermal conductivity, the use of infrared (electric / gas catalytic) or combined convectional / infrared ovens is recommended. In order to determine ideal curing conditions, we recommend practical trials with the object in question and curing oven. The curing conditions must be carefully controlled. Powder coatings cured outside the curing window may show deficiencies in the film flexibility. Our technical customer service will advise you.

Reclaimability

Small portions of recycled powder can be added, automatically if possible, to the fresh powder.

Important: Keep overspray to an absolute minimum.



Film properties

Tested on

Substrate:

EGGER MBP-L 25 mm

Tested setting:

Tested with 381M with a total film thickness > 160µm

Object temperature:

275 °F, 5 min.

Mechanical tests

Hinge Hole Test

≤ 1.1

IGP AA341.54

Chemical tests

Acetone test

2N Level 2

IGP AA341.58



More information

Packaging

20 kg cardboard box with inserted antistatic PE liner

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code “080201 Coating Powder Wastes” in accordance with the European Waste Catalogue into consideration.