



88

IGP Powder Coatings

TDS IGP-RAPID®complete 8862B-A2|240424|v1.2

This application-related advice is given to the best of our knowledge. However, this information is non-obligatory and does not exempt you from carrying out your own tests. Application, use and processing of these products are beyond our control and are therefore on your responsibility.

Consult the Safety Data Sheet prior to use. Article-specific safety data sheet and comprehensive risk management measures available at: **igp-powder.com**

IGP Powder Coatings

TDS IGP-RAPID®complete 8862B-A2|240424|v1.2

Technical data sheet

IGP-RAPID®complete 8862B-A2

Matt, highly reactive single-coat powder clear coat on a polyester resin base for wood and wood-based materials.



Characteristics

- Deep matte
- Natural smooth
- Transparent
- Indoor quality



Powder properties

Particle size:

Solids:

Density:

Suitability for storage:

< 100 µm
> 99 %
1.2 kg/l-1.4 kg/l
min. 6 months at ≤ 15 °C
min. 12 months at ≤ 5 °C
in an unopened original container
Color tones:
transparent-unicolor



Processing

Pre-treatment

If the surface finish of the MDF ex-works does not meet the quality requirements of the end product, the surface has to be sanded. This will ensure that the material has an evenly smooth surface and is free of any contaminants, minor scratches, dust, grease, etc. For more information, see IGP-TI 111.

Coating devices

All conventional electrostatic systems with corona charging.

For the construction and operation of powder coating plants, the following regulations must be complied with: ATEX RL 2014/34/EU, EN 50177, DIN EN 16985.


Recommended film thickness

80 µm - 120 µm

A homogeneous coating result with textured coatings or article-and color specific differences in hiding power may require higher coating thicknesses. The corresponding processing guidelines must be observed.

For a pre-calculation of the required powder coating quantity, the necessary coating thickness must be determined for each article.

Curing conditions

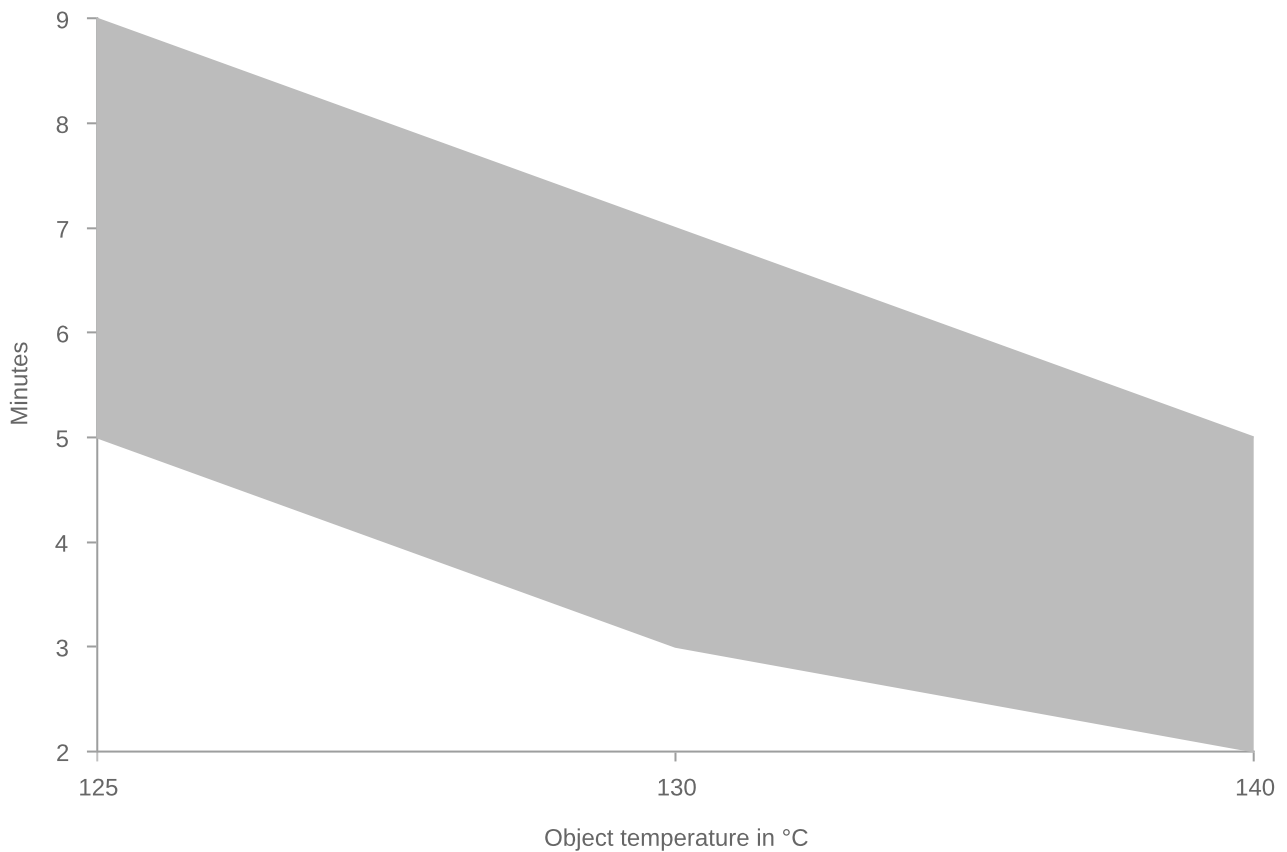

| T Object | t _{min} | t _{max} |
|----------|------------------|------------------|
| 125 °C | 5 minutes | 9 minutes |
| 130 °C | 3 minutes | 7 minutes |
| 140 °C | 2 minutes | 5 minutes |

Due to the limited thermal conductivity, the use of infrared- (electric / gas catalytic) or convectional - infrared combined ovens is recommended.

In order to determine ideal curing conditions, we recommend practical trials with the respective object and curing oven.

The curing conditions must be carefully controlled. Powder coatings cured outside the curing window may show deficiencies in the film flexibility. Our technical customer service will advise you.

Reclaimability

Small portions of recycled powder can be added, automatically if possible, to the fresh powder.

Important: Keep overspray to an absolute minimum. Processing instruction VR214 must be observed.



Film properties

Tested on

Substrate:

EGGER MBP-L 25mm

Film thickness:

110 µm - 130 µm
Object temperature:
130 °C, 3 min.
Mechanical tests
Hinge Hole Test
1.1
IGP AA341.54
Chemical tests
Acetone test
2N Level 2
IGP AA341.58



Further information

Packaging

15 kg cardboard box with inserted antistatic PE liner

Overcoating

For repainting slight sanding is necessary.

Protection of coated parts

Coated parts should be packed after cooling with suitable materials without plasticizers. They should be stored protected from the weather to avoid the formation of condensation and thus water spots on the coating.

Cleaning

The coated parts must be cleaned according to the directives RAL-GZ 632 or SZFF 61.01.

Paint removal and disposal

After use, coated goods should be supplied to the normal recycling process. The disposal methods for sludges or residual powders must be observed in accordance with the local official provisions whilst taking Waste Code "080201 Coating Powder Wastes" in accordance with the European Waste Catalogue into consideration.